



- [International Property Maintenance Code](#)
 - [\[2012 \(Second Printing\) \]](#)

- [Chapter 2 - Definitions](#)

- [SECTION 201 GENERAL](#)

- [SECTION 202 GENERAL DEFINITIONS](#)

[201.1 Scope.](#)

[201.2 Interchangeability.](#)

[201.3 Terms defined in other codes.](#)

[201.4 Terms not defined.](#)

[201.5 Parts.](#)

[201.1 Scope.](#)

[201.2 Interchangeability.](#)

[201.3 Terms defined in other codes.](#)

[201.4 Terms not defined.](#)

[1.5 Parts.](#)

[Top](#) [Previous Section](#) [Next Section](#)
Next Section option.

To view the next subsection please select the

SECTION 201 GENERAL

201.1 Scope.

Unless otherwise expressly stated, the following terms shall, for the purposes of this code, have the meanings shown in this chapter.

201.2 Interchangeability.

Words stated in the present tense include the future; words stated in the masculine gender include the feminine and neuter; the singular number includes the plural and the plural, the singular.

201.3 Terms defined in other codes.

Where terms are not defined in this code and are defined in the *International Building Code*, *International Existing Building Code*, *International Fire Code*, *International Fuel Gas Code*, *International Mechanical Code*, *International Plumbing Code*, *International Residential Code*, *International Zoning Code* or NFPA 70, such terms shall have the meanings ascribed to them as stated in those

codes.

201.4 Terms not defined.

Where terms are not defined through the methods authorized by this section, such terms shall have ordinarily accepted meanings such as the context implies.

201.5 Parts.

Whenever the words "*dwelling unit*," "*dwelling*," "*premises*," "*building*," "*rooming house*," "*rooming unit*," "*housekeeping unit*" or "*story*" are stated in this code, they shall be construed as though they were followed by the words "or any part thereof."

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL



- International Property Maintenance Code
- [2012 (Second Printing)]

■ Chapter 2 - Definitions

- SECTION 201 GENERAL
- SECTION 202 GENERAL DEFINITIONS

Top Previous Section Next Section To view the next subsection please select the Next Section option.

SECTION 202 GENERAL DEFINITIONS

ANCHORED. Secured in a manner that provides positive connection.

[A] APPROVED. *Approved* by the code official.

BASEMENT. That portion of a building which is partly or completely below grade.

BATHROOM. A room containing plumbing fixtures including a bathtub or shower.

BEDROOM. Any room or space used or intended to be used for sleeping purposes in either a dwelling or *sleeping unit*.

[A] CODE OFFICIAL. The official who is charged with the administration and enforcement of this code, or any duly authorized representative.

CONDEMN. To adjudge unfit for *occupancy*.

DETACHED. When a structural element is physically disconnected from another and that connection is necessary to provide a positive connection.

DETERIORATION. To weaken, disintegrate, corrode, rust or decay and lose effectiveness.

[B] DWELLING UNIT. A single unit providing complete, independent living facilities for one or more persons, including permanent provisions for living, sleeping, eating, cooking and sanitation.

[Z] EASEMENT. That portion of land or property reserved for present or future use by a person or agency other than the legal fee *owner(s)* of the property. The *easement* shall be permitted to be for use under, on or above a said lot or lots.

EQUIPMENT SUPPORT. Those structural members or assemblies of members or manufactured elements, including braces, frames, lugs, snuggers, hangers or saddles, that transmit gravity load, lateral load and operating load between the equipment and the structure.

EXTERIOR PROPERTY. The open space on the *premises* and on adjoining property under the control of *owners* or *operators* of such *premises*.

GARBAGE. The animal or vegetable waste resulting from the handling, preparation, cooking and consumption of food.

[B] GUARD. A building component or a system of building components located at or near the open sides of elevated walking surfaces that minimizes the possibility of a fall from the walking surface to a lower level.

[B] HABITABLE SPACE. Space in a structure for living, sleeping, eating or cooking. *Bathrooms, toilet rooms, closets, halls, storage or utility spaces, and similar areas* are not considered *habitable spaces*.

HOUSEKEEPING UNIT. A room or group of rooms forming a single *habitable space* equipped and intended to be used for living, sleeping, cooking and eating which does not contain, within such a unit, a toilet, lavatory and bathtub or shower.

IMMINENT DANGER. A condition which could cause serious or life-threatening injury or death at any time.

INFESTATION. The presence, within or contiguous to, a structure or *premises* of insects, rats, vermin or other pests.

INOPERABLE MOTOR VEHICLE. A vehicle which cannot be driven upon the public streets for reason including but not limited to being unlicensed, wrecked, abandoned, in a state of disrepair, or incapable of being moved under its own power.

[A] LABELED. Equipment, materials or products to which have been affixed a label, seal, symbol or other identifying mark of a nationally recognized testing laboratory, inspection agency or other organization concerned with product evaluation that maintains periodic inspection of the production of the above-*labeled* items and whose labeling indicates either that the equipment, material or product meets identified standards or has been tested and found suitable for a specified purpose.

LET FOR OCCUPANCY or LET. To permit, provide or offer possession or *occupancy* of a dwelling, *dwelling unit*, *rooming unit*, building, premise or structure by a person who is or is not the legal *owner* of record thereof, pursuant to a written or unwritten lease, agreement or license, or pursuant to a recorded or unrecorded agreement of contract for the sale of land.

NEGLECT. The lack of proper maintenance for a building or *structure*.

[A] OCCUPANCY. The purpose for which a building or portion thereof is utilized or occupied.

OCCUPANT. Any individual living or sleeping in a building, or having possession of a space within a building.

OPENABLE AREA. That part of a window, skylight or door which is available for unobstructed *ventilation* and which opens directly to the outdoors.

OPERATOR. Any person who has charge, care or control of a structure or *premises* which is let or offered for *occupancy*.

[A] OWNER. Any person, agent, *operator*, firm or corporation having a legal or equitable interest in the property; or recorded in the official records of the state, county or municipality as holding title to the property; or otherwise having control of the property, including the guardian of the estate of any such person, and the executor or administrator of the estate of such person if ordered to take possession of real property by a court.

PERSON. An individual, corporation, partnership or any other group acting as a unit.

PEST ELIMINATION. The control and elimination of insects, rodents or other pests by eliminating their harborage places; by removing or making inaccessible

materials that serve as their food or water; by other *approved pest elimination* methods.

[A] PREMISES. A lot, plot or parcel of land, *easement* or *public way*, including any structures thereon.

[A] PUBLIC WAY. Any street, alley or similar parcel of land essentially unobstructed from the ground to the sky, which is deeded, dedicated or otherwise permanently appropriated to the public for public use.

ROOMING HOUSE. A building arranged or occupied for lodging, with or without meals, for compensation and not occupied as a one- or two-family dwelling.

ROOMING UNIT. Any room or group of rooms forming a single habitable unit occupied or intended to be occupied for sleeping or living, but not for cooking purposes.

RUBBISH. Combustible and noncombustible waste materials, except garbage; the term shall include the residue from the burning of wood, coal, coke and other combustible materials, paper, rags, cartons, boxes, wood, excelsior, rubber, leather, tree branches, *yard* trimmings, tin cans, metals, mineral matter, glass, crockery and dust and other similar materials.

[B] SLEEPING UNIT. A room or space in which people sleep, which can also include permanent provisions for living, eating and either sanitation or kitchen facilities, but not both. Such rooms and spaces that are also part of a *dwelling unit* are not *sleeping units*.

STRICT LIABILITY OFFENSE. An offense in which the prosecution in a legal proceeding is not required to prove criminal intent as a part of its case. It is enough to prove that the defendant either did an act which was prohibited, or failed to do an act which the defendant was legally required to do.

[A] STRUCTURE. That which is built or constructed or a portion thereof.

TENANT. A person, corporation, partnership or group, whether or not the legal *owner* of record, occupying a building or portion thereof as a unit.

TOILET ROOM. A room containing a water closet or urinal but not a bathtub or

shower.

ULTIMATE DEFORMATION. The deformation at which failure occurs and which shall be deemed to occur if the sustainable load reduces to 80 percent or less of the maximum strength.


[M] VENTILATION. The natural or mechanical process of supplying conditioned or unconditioned air to, or removing such air from, any space.

WORKMANLIKE. Executed in a skilled manner; e.g., generally plumb, level, square, in line, undamaged and without marring adjacent work.

[Z] YARD. An open space on the same lot with a structure.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL

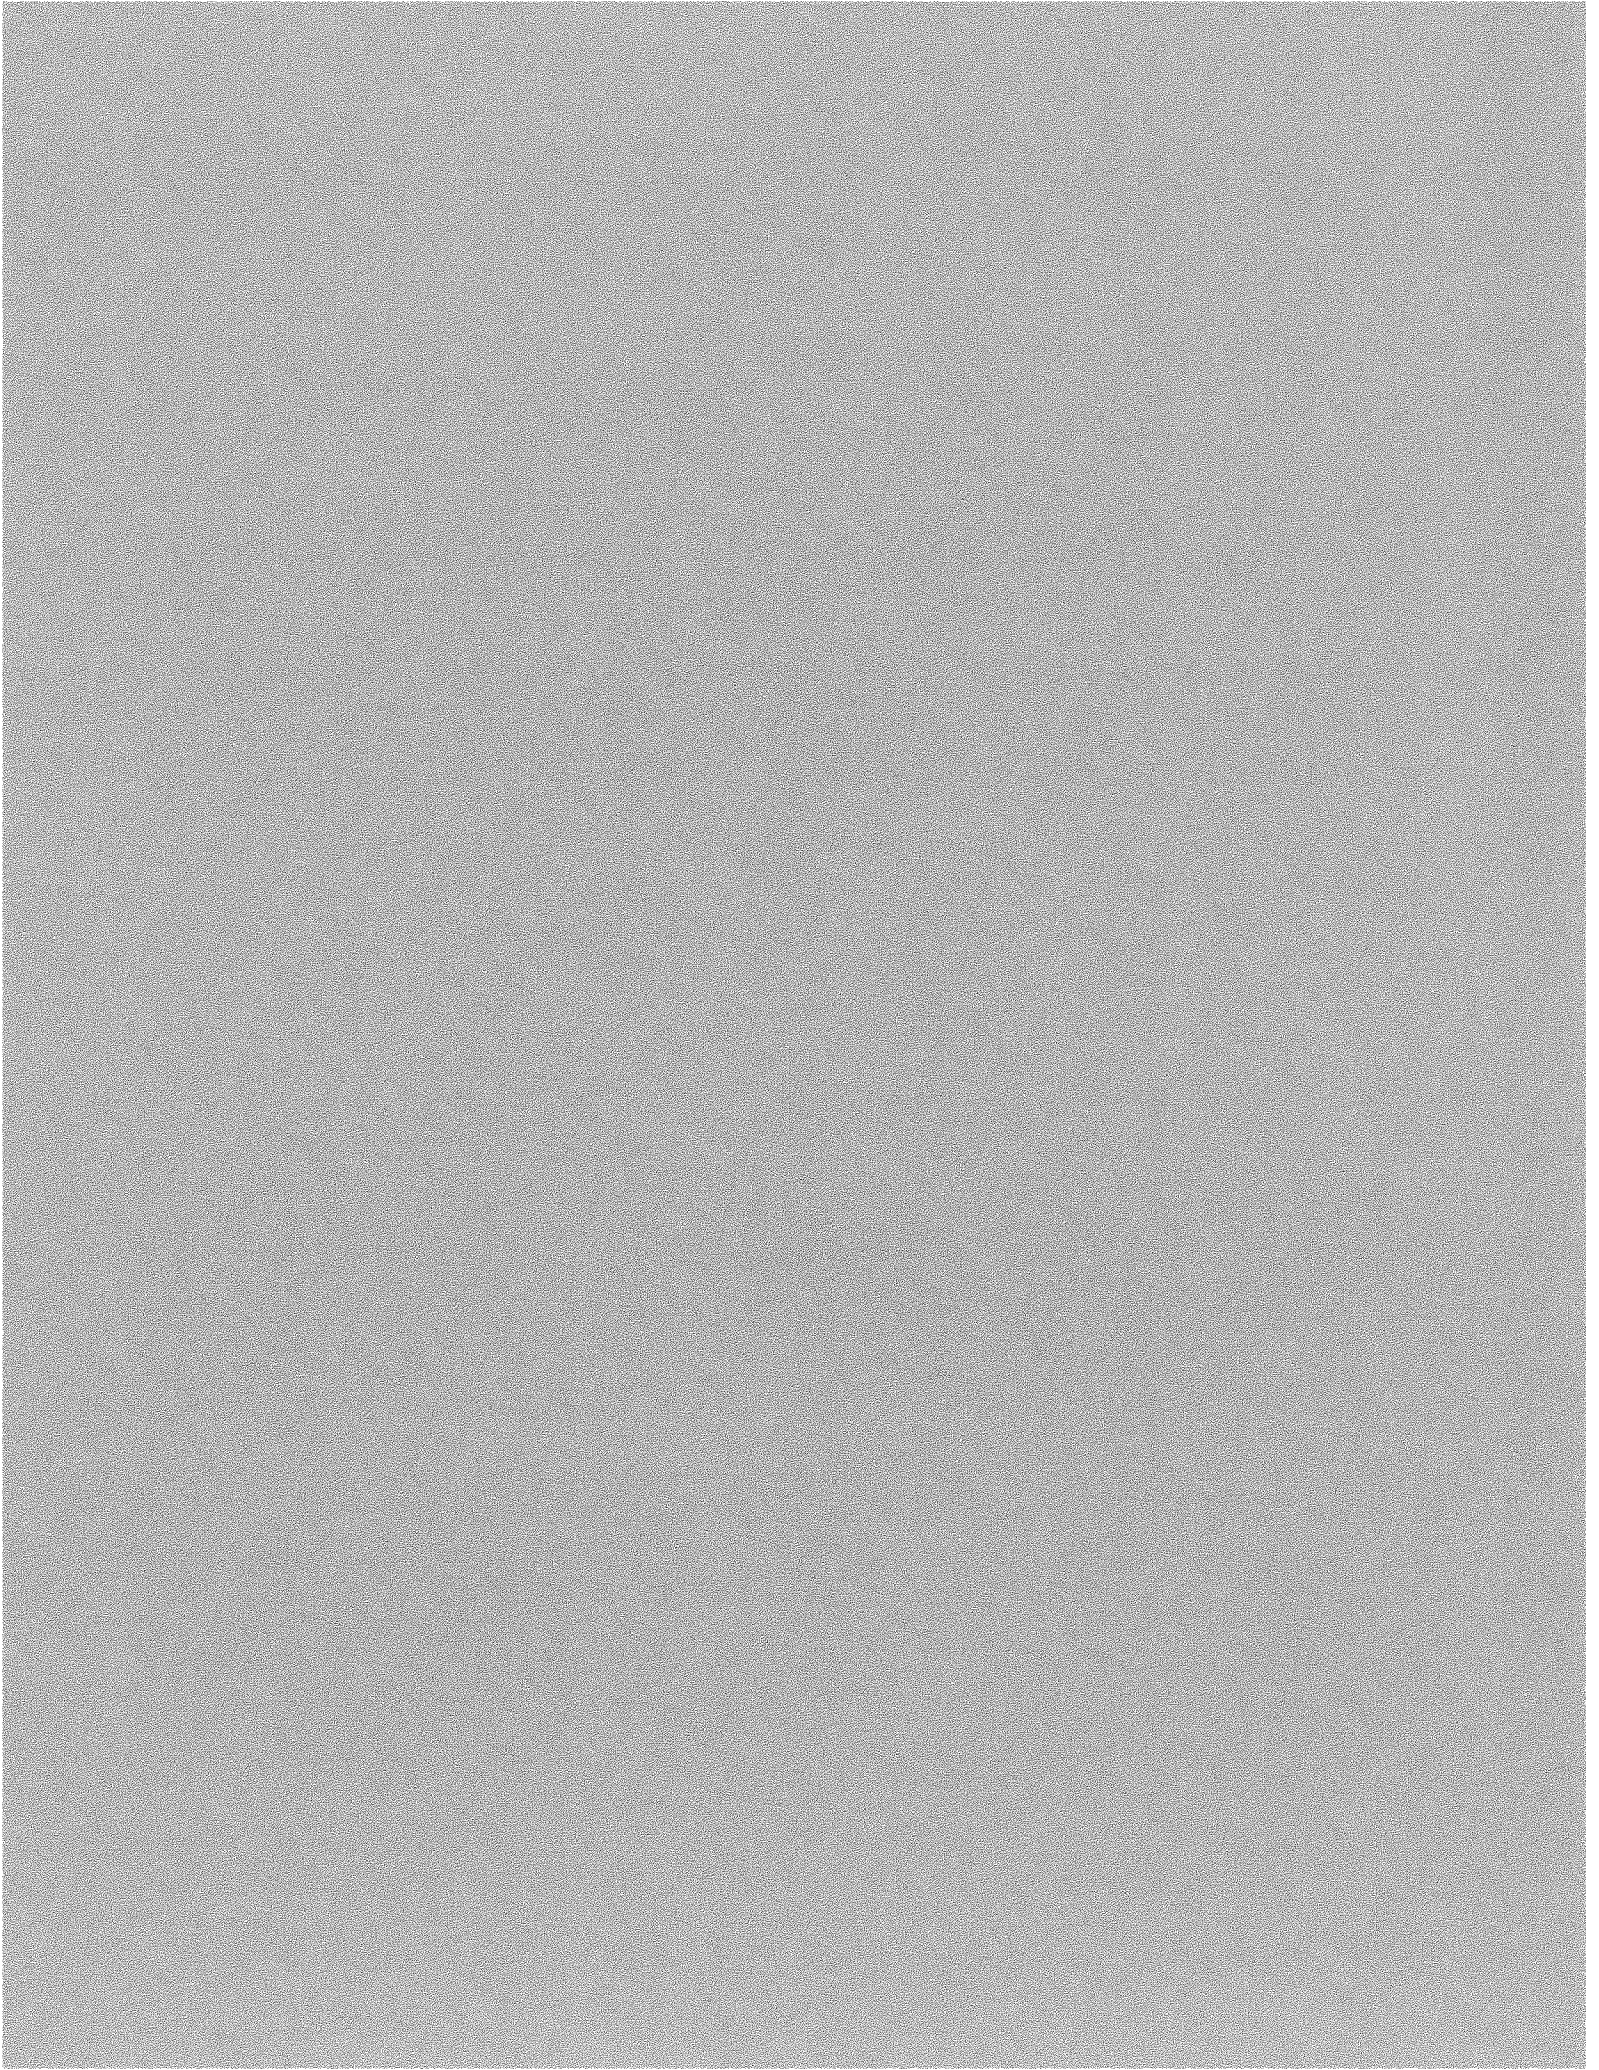

- International Property Maintenance Code
- [2012 (Second Printing)]

- Chapter 3 - General Requirements

- SECTION 301 GENERAL
- SECTION 302 EXTERIOR PROPERTY AREAS
- SECTION 303 SWIMMING POOLS, SPAS AND HOT TUBS
- SECTION 304 EXTERIOR STRUCTURE
- SECTION 305 INTERIOR STRUCTURE
- SECTION 306 COMPONENT SERVICEABILITY
- SECTION 307 HANDRAILS AND GUARDRAILS
- SECTION 308 RUBBISH AND GARBAGE
- SECTION 309 PEST ELIMINATION

301.1 Scope.

301.2 Responsibility.

301.3 Vacant structures and land.

301.1 Scope.

301.2 Responsibility.

301.3 Vacant structures and land.

Top Previous Section Next Section

Next Section option.

To view the next subsection please select the

SECTION 301 GENERAL

301.1 Scope.

The provisions of this chapter shall govern the minimum conditions and the responsibilities of persons for maintenance of structures, equipment and *exterior property*.

301.2 Responsibility.

The *owner* of the *premises* shall maintain the structures and *exterior property* in compliance with these requirements, except as otherwise provided for in this code. A person shall not occupy as owner-occupant or permit another person to occupy *premises* which are not in a sanitary and safe condition and which do not comply with the requirements of this chapter. *Occupants* of a *dwelling unit*, *rooming unit* or *housekeeping unit* are responsible for keeping in a clean, sanitary and safe condition

that part of the *dwelling unit, rooming unit, housekeeping unit* or *premises* which they occupy and control.

301.3 Vacant structures and land.

All vacant structures and *premises* thereof or vacant land shall be maintained in a clean, safe, secure and sanitary condition as provided herein so as not to cause a blighting problem or adversely affect the public health or safety.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL

302.1 Sanitation.

All *exterior property* and *premises* shall be maintained in a clean, safe and sanitary condition. The *occupant* shall keep that part of the *exterior property* which such *occupant* occupies or controls in a clean and sanitary condition.

302.2 Grading and drainage.

All *premises* shall be graded and maintained to prevent the erosion of soil and to prevent the accumulation of stagnant water thereon, or within any structure located thereon.

Exception: *Approved* retention areas and reservoirs.

302.3 Sidewalks and driveways.

All sidewalks, walkways, stairs, driveways, parking spaces and similar areas shall be kept in a proper state of repair, and maintained free from hazardous conditions.

302.4 Weeds.

All *premises* and *exterior property* shall be maintained free from weeds or plant growth in excess of 12 inches. All noxious weeds shall be prohibited. Weeds shall be defined as all grasses, annual plants and vegetation, other than trees or shrubs provided; however, this term shall not include cultivated flowers and gardens.

Upon failure of the *owner* or agent having charge of a property to cut and destroy weeds after service of a notice of violation, they shall be subject to prosecution in accordance with Section 106.3 and as prescribed by the authority having jurisdiction. Upon failure to comply with the notice of violation, any duly authorized employee of the jurisdiction or contractor hired by the jurisdiction shall be authorized to enter upon the property in violation and cut and destroy the weeds growing thereon, and the costs of such removal shall be paid by the *owner* or agent responsible for the property.

302.5 Rodent harborage.

All structures and *exterior property* shall be kept free from rodent harborage and *infestation*. Where rodents are found, they shall be promptly exterminated by *approved* processes which will not be injurious to human health. After pest elimination, proper precautions shall be taken to eliminate rodent harborage and prevent reinfestation.

302.6 Exhaust vents.

Pipes, ducts, conductors, fans or blowers shall not discharge gases, steam, vapor, hot air, grease, smoke, odors or other gaseous or particulate wastes directly upon abutting or adjacent public or private property or that of another *tenant*.

302.7 Accessory structures.

All accessory structures, including *detached* garages, fences and walls, shall be maintained structurally sound and in good repair.

302.8 Motor vehicles.

Except as provided for in other regulations, no more than 2 inoperative or unlicensed motor vehicles shall be parked, kept or stored outside on any *premises*, and no vehicle shall at any time be in a state of major disassembly, disrepair, or in the process of being stripped or dismantled. Painting of vehicles is prohibited unless conducted inside an *approved* spray booth.

Exception: A vehicle of any type is permitted to undergo major overhaul, including body work, provided that such work is performed inside a structure or similarly enclosed area designed and *approved* for such purposes.

302.9 Defacement of property.

No person shall willfully or wantonly damage, mutilate or deface any exterior surface of any structure or building on any private or public property by placing thereon any marking, carving or graffiti.

It shall be the responsibility of the *owner* to restore said surface to an *approved* state of maintenance and repair.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL



- International Property Maintenance Code
- [2012 (Second Printing)]

- Chapter 3 - General Requirements

- SECTION 301 GENERAL
- SECTION 302 EXTERIOR PROPERTY AREAS
- SECTION 303 SWIMMING POOLS, SPAS AND HOT TUBS
- SECTION 304 EXTERIOR STRUCTURE
- SECTION 305 INTERIOR STRUCTURE
- SECTION 306 COMPONENT SERVICEABILITY
- SECTION 307 HANDRAILS AND GUARDRAILS
- SECTION 308 RUBBISH AND GARBAGE
- SECTION 309 PEST ELIMINATION

303.1 Swimming pools.

303.2 Enclosures.

3.1 Swimming pools.

303.2 Enclosures.

Top Previous Section Next Section To view the next subsection please select the Next Section option.

SECTION 303 SWIMMING POOLS, SPAS AND HOT TUBS

303.1 Swimming pools.

Swimming pools shall be maintained in a clean and sanitary condition, and in good repair.

303.2 Enclosures.


Private swimming pools, hot tubs and spas, containing water more than 24 inches (610 mm) in depth shall be completely surrounded by a fence or barrier at least 48 inches (1219 mm) in height above the finished ground level measured on the side of the barrier away from the pool. Gates and doors in such barriers shall be self-closing and self-latching. Where the self-latching device is a minimum of 54 inches (1372 mm) above the bottom of the gate, the release mechanism shall be located on the pool side of the gate. Self-closing and self-latching gates shall be maintained such that the gate will positively close and latch when released from an open position of 6 inches (152 mm) from the gatepost. No existing pool enclosure shall be removed, replaced

or changed in a manner that reduces its effectiveness as a safety barrier.

Exception: Spas or hot tubs with a safety cover that complies with ASTM F 1346 shall be exempt from the provisions of this section.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL



- International Property Maintenance Code
 - [2012 (Second Printing)]

- Chapter 3 - General Requirements

- SECTION 301 GENERAL
- SECTION 302 EXTERIOR PROPERTY AREAS
- SECTION 303 SWIMMING POOLS, SPAS AND HOT TUBS
- SECTION 304 EXTERIOR STRUCTURE
- SECTION 305 INTERIOR STRUCTURE
- SECTION 306 COMPONENT SERVICEABILITY
- SECTION 307 HANDRAILS AND GUARDRAILS
- SECTION 308 RUBBISH AND GARBAGE
- SECTION 309 PEST ELIMINATION

304.1 General.

304.2 Protective treatment.

304.3 Premises identification.

304.4 Structural members.

304.5 Foundation walls.

304.6 Exterior walls.

304.7 Roofs and drainage.

304.8 Decorative features.

304.9 Overhang extensions.

304.10 Stairways, decks, porches and balconies.

304.11 Chimneys and towers.

304.12 Handrails and guards.

304.13 Window, skylight and door frames.

304.14 Insect screens.

304.15 Doors.

304.16 Basement hatchways.

304.17 Guards for basement windows.

304.18 Building security.

304.19 Gates.

304.1 General.

304.2 Protective treatment.

[F] 304.3 Premises identification.

304.4 Structural members.

304.5 Foundation walls.

304.6 Exterior walls.

304.7 Roofs and drainage.

304.8 Decorative features.

304.9 Overhang extensions.

304.10 Stairways, decks, porches and balconies.

304.11 Chimneys and towers.

304.12 Handrails and guards.

304.13 Window, skylight and door frames.

304.14 Insect screens.

304.15 Doors.

304.16 Basement hatchways.

304.17 Guards for basement windows.

304.18 Building security.

304.19 Gates.

Top Previous Section Next Section To view the next subsection please select the Next Section option.

SECTION 304 EXTERIOR STRUCTURE

304.1 General.

The exterior of a structure shall be maintained in good repair, structurally sound and sanitary so as not to pose a threat to the public health, safety or welfare.

304.1.1 Unsafe conditions.

The following conditions shall be determined as unsafe and shall be repaired or replaced to comply with the *International Building Code* or the *International Existing Building Code* as required for existing buildings:

1. The nominal strength of any structural member is exceeded by nominal loads, the load effects or the required strength;
2. The *anchorage* of the floor or roof to walls or columns, and of walls and columns to foundations is not capable of resisting all nominal loads or load effects;
3. Structures or components thereof that have reached their limit state;
4. Siding and masonry joints including joints between the building envelope and the perimeter of windows, doors and skylights are not maintained, weather

resistant or water tight;

5. Structural members that have evidence of *deterioration* or that are not capable of safely supporting all nominal loads and load effects;

6. Foundation systems that are not firmly supported by footings, are not plumb and free from open cracks and breaks, are not properly *anchored* or are not capable of supporting all nominal loads and resisting all load effects;

7. Exterior walls that are not *anchored* to supporting and supported elements or are not plumb and free of holes, cracks or breaks and loose or rotting materials, are not properly *anchored* or are not capable of supporting all nominal loads and resisting all load effects;

8. Roofing or roofing components that have defects that admit rain, roof surfaces with inadequate drainage, or any portion of the roof framing that is not in good repair with signs of *deterioration*, fatigue or without proper anchorage and incapable of supporting all nominal loads and resisting all load effects;

9. Flooring and flooring components with defects that affect serviceability or flooring components that show signs of *deterioration* or fatigue, are not properly *anchored* or are incapable of supporting all nominal loads and resisting all load effects;

10. Veneer, cornices, belt courses, corbels, trim, wall facings and similar decorative features not properly anchored or that are anchored with connections not capable of supporting all nominal loads and resisting all load effects;

11. Overhang extensions or projections including, but not limited to, trash chutes, canopies, marquees, signs, awnings, fire escapes, standpipes and exhaust ducts not properly *anchored* or that are *anchored* with connections not capable of supporting all nominal loads and resisting all load effects;

12. Exterior stairs, decks, porches, balconies and all similar appurtenances attached thereto, including *guards* and handrails, are not structurally sound, not properly *anchored* or that are *anchored* with connections not capable of supporting all nominal loads and resisting all load effects; or

13. Chimneys, cooling towers, smokestacks and similar appurtenances not structurally sound or not properly *anchored*, or that are anchored with connections not capable of supporting all nominal loads and resisting all load

effects.

Exceptions:

1. When substantiated otherwise by an *approved* method.
2. Demolition of unsafe conditions shall be permitted when *approved* by the *code official*.

304.2 Protective treatment.

All exterior surfaces, including but not limited to, doors, door and window frames, cornices, porches, trim, balconies, decks and fences, shall be maintained in good condition. Exterior wood surfaces, other than decay-resistant woods, shall be protected from the elements and decay by painting or other protective covering or treatment. Peeling, flaking and chipped paint shall be eliminated and surfaces repainted. All siding and masonry joints, as well as those between the building envelope and the perimeter of windows, doors and skylights, shall be maintained weather resistant and water tight. All metal surfaces subject to rust or corrosion shall be coated to inhibit such rust and corrosion, and all surfaces with rust or corrosion shall be stabilized and coated to inhibit future rust and corrosion. Oxidation stains shall be removed from exterior surfaces. Surfaces designed for stabilization by oxidation are exempt from this requirement.

[F] 304.3 Premises identification.

Buildings shall have *approved* address numbers placed in a position to be plainly legible and visible from the street or road fronting the property. These numbers shall contrast with their background. Address numbers shall be Arabic numerals or alphabet letters. Numbers shall be a minimum of 4 inches (102 mm) in height with a minimum stroke width of 0.5 inch (12.7 mm).

304.4 Structural members.

All structural members shall be maintained free from *deterioration*, and shall be capable of safely supporting the imposed dead and live loads.

304.5 Foundation walls.

All foundation walls shall be maintained plumb and free from open cracks and breaks and shall be kept in such condition so as to prevent the entry of rodents and other pests.

304.6 Exterior walls.

All exterior walls shall be free from holes, breaks, and loose or rotting materials; and maintained weatherproof and properly surface coated where required to prevent *deterioration*.

304.7 Roofs and drainage.

The roof and flashing shall be sound, tight and not have defects that admit rain. Roof drainage shall be adequate to prevent dampness or *deterioration* in the walls or interior portion of the structure. Roof drains, gutters and downspouts shall be maintained in good repair and free from obstructions. Roof water shall not be discharged in a manner that creates a public nuisance.

304.8 Decorative features.

All cornices, belt courses, corbels, terra cotta trim, wall facings and similar decorative features shall be maintained in good repair with proper anchorage and in a safe condition.

304.9 Overhang extensions.

All overhang extensions including, but not limited to canopies, marquees, signs, metal awnings, fire escapes, standpipes and exhaust ducts shall be maintained in good repair and be properly *anchored* so as to be kept in a sound condition. When required, all exposed surfaces of metal or wood shall be protected from the elements and against decay or rust by periodic application of weather-coating materials, such as paint or similar surface treatment.

304.10 Stairways, decks, porches and balconies.

Every exterior stairway, deck, porch and balcony, and all appurtenances attached thereto, shall be maintained structurally sound, in good repair, with proper anchorage and capable of supporting the imposed loads.

304.11 Chimneys and towers.

All chimneys, cooling towers, smoke stacks, and similar appurtenances shall be maintained structurally safe and sound, and in good repair. All exposed surfaces of metal or wood shall be protected from the elements and against decay or rust by periodic application of weather-coating materials, such as paint or similar surface treatment.

304.12 Handrails and guards.

Every handrail and *guard* shall be firmly fastened and capable of supporting normally

imposed loads and shall be maintained in good condition.

304.13 Window, skylight and door frames.

Every window, skylight, door and frame shall be kept in sound condition, good repair and weather tight.

304.13.1 Glazing.

All glazing materials shall be maintained free from cracks and holes.

304.13.2 Openable windows.

Every window, other than a fixed window, shall be easily openable and capable of being held in position by window hardware.

304.14 Insect screens.

During the period from April 1 to October 31, every door, window and other outside opening required for *ventilation* of habitable rooms, food preparation areas, food service areas or any areas where products to be included or utilized in food for human consumption are processed, manufactured, packaged or stored shall be supplied with *approved* tightly fitting screens of minimum 16 mesh per inch (16 mesh per 25 mm), and every screen door used for insect control shall have a self-closing device in good working condition.

Exception: Screens shall not be required where other *approved* means, such as air curtains or insect repellent fans, are employed.

304.15 Doors.

All exterior doors, door assemblies, operator systems if provided, and hardware shall be maintained in good condition. Locks at all entrances to dwelling units and sleeping units shall tightly secure the door. Locks on means of egress doors shall be in accordance with Section 702.3.

304.16 Basement hatchways.

Every *basement* hatchway shall be maintained to prevent the entrance of rodents, rain and surface drainage water.

304.17 Guards for basement windows.

Every *basement* window that is openable shall be supplied with rodent shields, storm windows or other *approved* protection against the entry of rodents.

304.18 Building security.

Doors, windows or hatchways for *dwelling units*, room units or *housekeeping units* shall be provided with devices designed to provide security for the *occupants* and property within.

304.18.1 Doors.

Doors providing access to a *dwelling unit*, *rooming unit* or *housekeeping unit* that is rented, leased or let shall be equipped with a deadbolt lock designed to be readily openable from the side from which egress is to be made without the need for keys, special knowledge or effort and shall have a minimum lock throw of 1 inch (25 mm). Such deadbolt locks shall be installed according to the manufacturer's specifications and maintained in good working order. For the purpose of this section, a sliding bolt shall not be considered an acceptable deadbolt lock.

304.18.2 Windows.

Operable windows located in whole or in part within 6 feet (1828 mm) above ground level or a walking surface below that provide access to a *dwelling unit*, *rooming unit* or *housekeeping unit* that is rented, leased or let shall be equipped with a window sash locking device.

304.18.3 Basement hatchways.

Basement hatchways that provide access to a *dwelling unit*, *rooming unit* or *housekeeping unit* that is rented, leased or let shall be equipped with devices that secure the units from unauthorized entry.

304.19 Gates.

All exterior gates, gate assemblies, operator systems if provided, and hardware shall be maintained in good condition. Latches at all entrances shall tightly secure the gates.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL



- International Property Maintenance Code
- [2012 (Second Printing)]

- Chapter 3 - General Requirements

- SECTION 301 GENERAL
- SECTION 302 EXTERIOR PROPERTY AREAS
- SECTION 303 SWIMMING POOLS, SPAS AND HOT TUBS
- SECTION 304 EXTERIOR STRUCTURE
- SECTION 305 INTERIOR STRUCTURE
- SECTION 306 COMPONENT SERVICEABILITY
- SECTION 307 HANDRAILS AND GUARDRAILS
- SECTION 308 RUBBISH AND GARBAGE
- SECTION 309 PEST ELIMINATION

305.1 General.

305.2 Structural members.

5.3 Interior surfaces.

305.4 Stairs and walking surfaces.

305.5 Handrails and guards.

305.6 Interior doors.

305.1 General.

305.2 Structural members.

305.3 Interior surfaces.

305.4 Stairs and walking surfaces.

305.5 Handrails and guards.

305.6 Interior doors.

Top Previous Section Next Section

Next Section option.

To view the next subsection please select the

SECTION 305 INTERIOR STRUCTURE

305.1 General.

The interior of a structure and equipment therein shall be maintained in good repair, structurally sound and in a sanitary condition. *Occupants* shall keep that part of the structure which they occupy or control in a clean and sanitary condition. Every *owner* of a structure containing a *rooming house*, *housekeeping units*, a hotel, a dormitory, two or more *dwelling units* or two or more nonresidential occupancies, shall

maintain, in a clean and sanitary condition, the shared or public areas of the structure and *exterior property*.

305.1.1 Unsafe conditions.

The following conditions shall be determined as unsafe and shall be repaired or replaced to comply with the *International Building Code* or the *International Existing Building Code* as required for existing buildings:

1. The nominal strength of any structural member is exceeded by nominal loads, the load effects or the required strength;
2. The anchorage of the floor or roof to walls or columns, and of walls and columns to foundations is not capable of resisting all nominal loads or load effects;
3. Structures or components thereof that have reached their limit state;
4. Structural members are incapable of supporting nominal loads and load effects;
5. Stairs, landings, balconies and all similar walking surfaces, including *guards* and handrails, are not structurally sound, not properly *anchored* or are *anchored* with connections not capable of supporting all nominal loads and resisting all load effects;
6. Foundation systems that are not firmly supported by footings are not plumb and free from open cracks and breaks, are not properly *anchored* or are not capable of supporting all nominal loads and resisting all load effects.

Exceptions:

1. When substantiated otherwise by an *approved* method.
2. Demolition of unsafe conditions shall be permitted when *approved* by the *code official*.

305.2 Structural members.

All structural members shall be maintained structurally sound, and be capable of supporting the imposed loads.

305.3 Interior surfaces.

1 interior surfaces, including windows and doors, shall be maintained in good, clean and sanitary condition. Peeling, chipping, flaking or abraded paint shall be repaired, removed or covered. Cracked or loose plaster, decayed wood and other defective surface conditions shall be corrected.

305.4 Stairs and walking surfaces.

Every stair, ramp, landing, balcony, porch, deck or other walking surface shall be maintained in sound condition and good repair.

305.5 Handrails and guards.

Every handrail and *guard* shall be firmly fastened and capable of supporting normally imposed loads and shall be maintained in good condition.

305.6 Interior doors.

Every interior door shall fit reasonably well within its frame and shall be capable of being opened and closed by being properly and securely attached to jambs, headers tracks as intended by the manufacturer of the attachment hardware.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL



- International Property Maintenance Code
 - [2012 (Second Printing)]

- Chapter 3 - General Requirements

- SECTION 301 GENERAL
- SECTION 302 EXTERIOR PROPERTY AREAS
- SECTION 303 SWIMMING POOLS, SPAS AND HOT TUBS
- SECTION 304 EXTERIOR STRUCTURE
- SECTION 305 INTERIOR STRUCTURE
- SECTION 306 COMPONENT SERVICEABILITY
- SECTION 307 HANDRAILS AND GUARDRAILS
- SECTION 308 RUBBISH AND GARBAGE
- SECTION 309 PEST ELIMINATION

306.1 General.

306.1 General.

Up Previous Section Next Section To view the next subsection please select the Next Section option.

SECTION 306 COMPONENT SERVICEABILITY

306.1 General.

The components of a structure and equipment therein shall be maintained in good repair, structurally sound and in a sanitary condition.

306.1.1 Unsafe conditions.

Where any of the following conditions cause the component or system to be beyond its limit state, the component or system shall be determined as unsafe and shall be repaired or replaced to comply with the *International Building Code* as required for existing buildings:

1. Soils that have been subjected to any of the following conditions:

1.1. Collapse of footing or foundation system;

1.2. Damage to footing, foundation, concrete or other structural element due to soil expansion;

1.3. Adverse effects to the design strength of footing, foundation, concrete or other structural element due to a chemical reaction from the soil;

1.4. Inadequate soil as determined by a geotechnical investigation;

1.5. Where the allowable bearing capacity of the soil is in doubt; or

1.6. Adverse effects to the footing, foundation, concrete or other structural element due to the ground water table.

2. Concrete that has been subjected to any of the following conditions:

2.1. *Deterioration*;

2.2. *Ultimate deformation*;

2.3. Fractures;

2.4. Fissures;

2.5. Spalling;

2.6. Exposed reinforcement; or

2.7. *Detached*, dislodged or failing connections.

3. Aluminum that has been subjected to any of the following conditions:

3.1. *Deterioration*;

3.2. Corrosion;

3.3. Elastic deformation;

3.4. *Ultimate deformation*;

3.5. Stress or strain cracks;

3.6. Joint fatigue; or

3.7. *Detached*, dislodged or failing connections.

4. Masonry that has been subjected to any of the following conditions:

4.1. *Deterioration*;

4.2. *Ultimate deformation*;

4.3. Fractures in masonry or mortar joints;

4.4. Fissures in masonry or mortar joints;

4.5. Spalling;

4.6. Exposed reinforcement; or

4.7. *Detached*, dislodged or failing connections.

5. Steel that has been subjected to any of the following conditions:

5.1. *Deterioration*;

5.2. Elastic deformation;

5.3. *Ultimate deformation*;

5.4. Metal fatigue; or

5.5. *Detached*, dislodged or failing connections.

6. Wood that has been subjected to any of the following conditions:

6.1. *Ultimate deformation*;

6.2. *Deterioration*;

6.3. Damage from insects, rodents and other vermin;

6.4. Fire damage beyond charring;

6.5. Significant splits and checks;

6.6. Horizontal shear cracks;

6.7. Vertical shear cracks;

6.8. Inadequate support;

6.9. *Detached*, dislodged or failing connections; or

6.10. Excessive cutting and notching.

Exceptions:

1. When substantiated otherwise by an *approved* method.

2. Demolition of unsafe conditions shall be permitted when *approved* by the *code official*.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL



- International Property Maintenance Code
- [2012 (Second Printing)]

- Chapter 3 - General Requirements

- SECTION 301 GENERAL
- SECTION 302 EXTERIOR PROPERTY AREAS
- SECTION 303 SWIMMING POOLS, SPAS AND HOT TUBS
- SECTION 304 EXTERIOR STRUCTURE
- SECTION 305 INTERIOR STRUCTURE
- SECTION 306 COMPONENT SERVICEABILITY
- SECTION 307 HANDRAILS AND GUARDRAILS
- SECTION 308 RUBBISH AND GARBAGE
- SECTION 309 PEST ELIMINATION

307.1 General.

307.1 General.

[Up Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

SECTION 307 HANDRAILS AND GUARDRAILS

307.1 General.

Every exterior and interior flight of stairs having more than four risers shall have a handrail on one side of the stair and every open portion of a stair, landing, balcony, porch, deck, ramp or other walking surface which is more than 30 inches (762 mm) above the floor or grade below shall have *guards*. Handrails shall not be less than 30 inches (762 mm) in height or more than 42 inches (1067 mm) in height measured vertically above the nosing of the tread or above the finished floor of the landing or walking surfaces. *Guards* shall not be less than 30 inches (762 mm) in height above the floor of the landing, balcony, porch, deck, or ramp or other walking surface.

Exception: *Guards* shall not be required where exempted by the adopted building code.

[Up Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL

- International Property Maintenance Code
- [2012 (Second Printing)]

- Chapter 3 - General Requirements

- SECTION 301 GENERAL
- SECTION 302 EXTERIOR PROPERTY AREAS
- SECTION 303 SWIMMING POOLS, SPAS AND HOT TUBS
- SECTION 304 EXTERIOR STRUCTURE
- SECTION 305 INTERIOR STRUCTURE
- SECTION 306 COMPONENT SERVICEABILITY
- SECTION 307 HANDRAILS AND GUARDRAILS
- SECTION 308 RUBBISH AND GARBAGE
- SECTION 309 PEST ELIMINATION

308.1 Accumulation of rubbish or garbage.

308.2 Disposal of rubbish.

308.3 Disposal of garbage.

[Top Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

SECTION 308 RUBBISH AND GARBAGE

308.1 Accumulation of rubbish or garbage.

All *exterior property* and *premises*, and the interior of every structure, shall be free from any accumulation of *rubbish* or garbage. There shall be stored no more than (8) 32 gallon bags on the property in a 2 week period.

308.2 Disposal of rubbish.

Every *occupant* of a structure shall dispose of all *rubbish* in a clean and sanitary manner by placing such *rubbish* in *approved* containers.

308.2.1 Rubbish storage facilities.

The *owner* of every occupied *premises* shall supply *approved* covered containers for *rubbish*, and the *owner* of the *premises* shall be responsible for

the removal of *rubbish*.

308.2.2 Refrigerators.

Refrigerators and similar equipment not in operation shall not be discarded, abandoned or stored on *premises* without first removing the doors.

308.3 Disposal of garbage.

Every *occupant* of a structure shall dispose of garbage in a clean and sanitary manner by placing such garbage in an *approved* garbage disposal facility or *approved* garbage containers.

308.3.1 Garbage facilities.

The *owner* of every dwelling shall supply one of the following: an *approved* mechanical food waste grinder in each *dwelling unit*; an *approved* incinerator unit in the structure available to the *occupants* in each *dwelling unit*; or an *approved* leakproof, covered, outside garbage container.

308.3.2 Containers.

The *operator* of every establishment producing garbage shall provide, and at all times cause to be utilized, *approved* leakproof containers provided with close-fitting covers for the storage of such materials until removed from the *premises* for disposal.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL



- International Property Maintenance Code
 - [2012 (Second Printing)]
- Chapter 3 - General Requirements
 - SECTION 301 GENERAL
 - SECTION 302 EXTERIOR PROPERTY AREAS
 - SECTION 303 SWIMMING POOLS, SPAS AND HOT TUBS
 - SECTION 304 EXTERIOR STRUCTURE
 - SECTION 305 INTERIOR STRUCTURE
 - SECTION 306 COMPONENT SERVICEABILITY
 - SECTION 307 HANDRAILS AND GUARDRAILS
 - SECTION 308 RUBBISH AND GARBAGE
 - SECTION 309 PEST ELIMINATION

309.1 Infestation.

309.2 Owner.

309.3 Single occupant.

309.4 Multiple occupancy.

309.5 Occupant.

309.1 Infestation.

309.2 Owner.

309.3 Single occupant.

309.4 Multiple occupancy.

309.5 Occupant.

Top Previous Section Next Section

Next Section option.

To view the next subsection please select the

SECTION 309 PEST ELIMINATION

309.1 Infestation.

All structures shall be kept free from insect and rodent *infestation*. All structures in which insects or rodents are found shall be promptly exterminated by *approved* processes that will not be injurious to human health. After pest elimination, proper precautions shall be taken to prevent reinfestation.

309.2 Owner.

The *owner* of any structure shall be responsible for pest elimination within the

structure prior to renting or leasing the structure.

309.3 Single occupant.

The *occupant* of a one-family dwelling or of a single-*tenant* nonresidential structure shall be responsible for pest elimination on the *premises*.

309.4 Multiple occupancy.

The *owner* of a structure containing two or more *dwelling units*, a multiple *occupancy*, a *rooming house* or a nonresidential structure shall be responsible for pest elimination in the public or shared areas of the structure and *exterior property*. If *infestation* is caused by failure of an *occupant* to prevent such *infestation* in the area occupied, the *occupant* and *owner* shall be responsible for pest elimination.


309.5 Occupant.

The *occupant* of any structure shall be responsible for the continued rodent and pest-free condition of the structure.

Exception: Where the *infestations* are caused by defects in the structure, the *owner* shall be responsible for pest elimination.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL

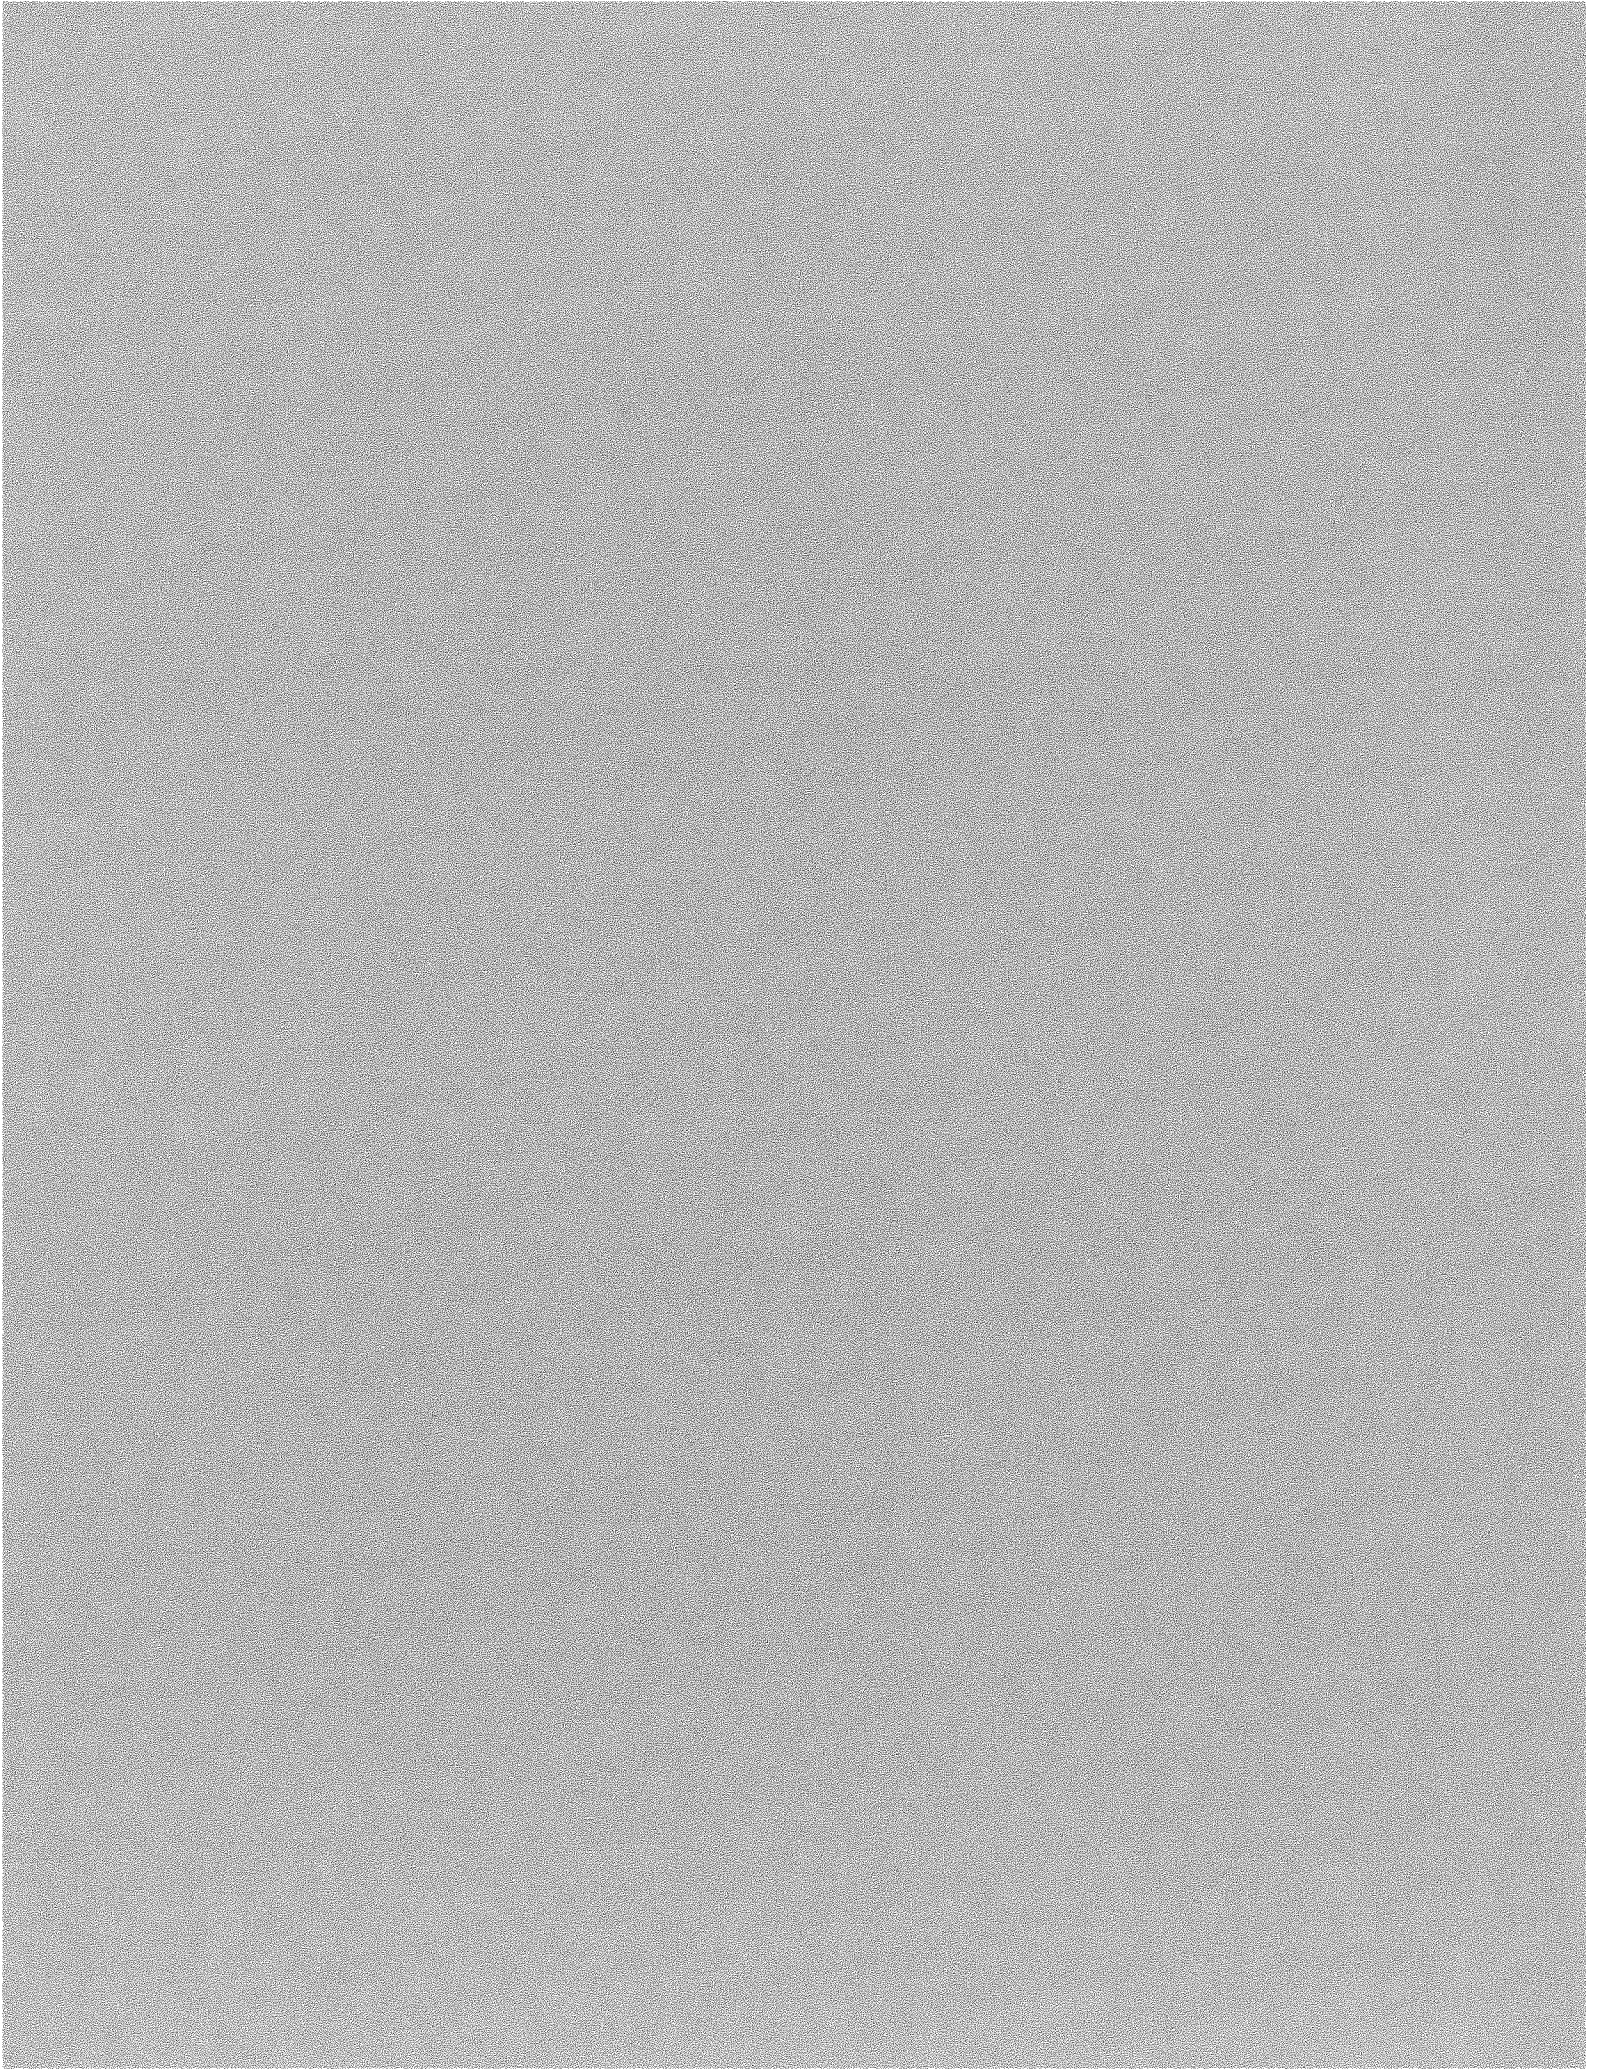



- International Property Maintenance Code
- [2012 (Second Printing)]

- Chapter 4 - Light, Ventilation and Occupancy Limitations
 - SECTION 401 GENERAL
 - SECTION 402 LIGHT
 - SECTION 403 VENTILATION
 - SECTION 404 OCCUPANCY LIMITATIONS

401.1 Scope.

401.2 Responsibility.

401.3 Alternative devices.

401.1 Scope.

401.2 Responsibility.

401.3 Alternative devices.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the [Next Section](#) option.

SECTION 401 GENERAL

401.1 Scope.

The provisions of this chapter shall govern the minimum conditions and standards for light, *ventilation* and space for occupying a structure.

401.2 Responsibility.

The *owner* of the structure shall provide and maintain light, *ventilation* and space conditions in compliance with these requirements. A person shall not occupy as *owner-occupant*, or permit another person to occupy, any *premises* that do not comply with the requirements of this chapter.

401.3 Alternative devices.

In lieu of the means for natural light and *ventilation* herein prescribed, artificial light or mechanical *ventilation* complying with the *International Building Code* shall be permitted.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the [Next Section](#) option.



- International Property Maintenance Code
 - [2012 (Second Printing)]
- Chapter 4 - Light, Ventilation and Occupancy Limitations
 - SECTION 401 GENERAL
 - SECTION 402 LIGHT
 - SECTION 403 VENTILATION
 - SECTION 404 OCCUPANCY LIMITATIONS

402.1 Habitable spaces.

402.2 Common halls and stairways.

402.3 Other spaces.

402.1 Habitable spaces.

402.2 Common halls and stairways.

402.3 Other spaces.

Top Previous Section Next Section

Next Section option.

To view the next subsection please select the

SECTION 402 LIGHT

402.1 Habitable spaces.

Every *habitable space* shall have at least one window of *approved* size facing directly to the outdoors or to a court. The minimum total glazed area for every *habitable space* shall be 8 percent of the floor area of such room. Wherever walls or other portions of a structure face a window of any room and such obstructions are located less than 3 feet (914 mm) from the window and extend to a level above that of the ceiling of the room, such window shall not be deemed to face directly to the outdoors nor to a court and shall not be included as contributing to the required minimum total window area for the room.

Exception: Where natural light for rooms or spaces without exterior glazing areas is provided through an adjoining room, the unobstructed opening to the adjoining room shall be at least 8 percent of the floor area of the interior room or space, but a

minimum of 25 square feet (2.33 m²). The exterior glazing area shall be based on the total floor area being served.

402.2 Common halls and stairways.


Every common hall and stairway in residential occupancies, other than in one- and two-family dwellings, shall be lighted at all times with at least a 60-watt standard incandescent light bulb for each 200 square feet (19 m²) of floor area or equivalent illumination, provided that the spacing between lights shall not be greater than 30 feet (9144 mm). In other than residential occupancies, means of egress, including exterior means of egress, stairways shall be illuminated at all times the building space served by the means of egress is occupied with a minimum of 1 footcandle (11 lux) at floors, landings and treads.

402.3 Other spaces.

All other spaces shall be provided with natural or artificial light sufficient to permit the maintenance of sanitary conditions, and the safe *occupancy* of the space and utilization of the appliances, equipment and fixtures.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL



- International Property Maintenance Code
 - [2012 (Second Printing)]
- Chapter 4 - Light, Ventilation and Occupancy Limitations
 - SECTION 401 GENERAL
 - SECTION 402 LIGHT
 - SECTION 403 VENTILATION
 - SECTION 404 OCCUPANCY LIMITATIONS

403.1 Habitable spaces.

403.2 Bathrooms and toilet rooms.

403.3 Cooking facilities.

403.4 Process ventilation.

403.5 Clothes dryer exhaust.

403.1 Habitable spaces.

403.2 Bathrooms and toilet rooms.

403.3 Cooking facilities.

403.4 Process ventilation.

403.5 Clothes dryer exhaust.

Top Previous Section Next Section
Next Section option.

To view the next subsection please select the

SECTION 403 VENTILATION

403.1 Habitable spaces.

Every *habitable space* shall have at least one openable window. The total openable area of the window in every room shall be equal to at least 45 percent of the minimum glazed area required in Section 402.1.

Exception: Where rooms and spaces without openings to the outdoors are ventilated through an adjoining room, the unobstructed opening to the adjoining room shall be at least 8 percent of the floor area of the interior room or space, but a minimum of 25 square feet (2.33 m²). The *ventilation* openings to the outdoors shall be based on a total floor area being ventilated.

403.2 Bathrooms and toilet rooms.

Every *bathroom* and *toilet room* shall comply with the *ventilation* requirements for

habitable spaces as required by Section 403.1, except that a window shall not be required in such spaces equipped with a mechanical *ventilation* system. Air exhausted by a mechanical *ventilation* system from a *bathroom* or *toilet room* shall discharge to the outdoors and shall not be recirculated.

403.3 Cooking facilities.

Unless *approved* through the certificate of *occupancy*, cooking shall not be permitted in any *rooming unit* or dormitory unit, and a cooking facility or appliance shall not be permitted to be present in the *rooming unit* or dormitory unit.

Exceptions:

1. Where specifically *approved* in writing by the *code official*.
2. Devices such as coffee pots and microwave ovens shall not be considered cooking appliances.

403.4 Process ventilation.

Where injurious, toxic, irritating or noxious fumes, gases, dusts or mists are generated, a local exhaust *ventilation* system shall be provided to remove the contaminating agent at the source. Air shall be exhausted to the exterior and not be recirculated to any space.

403.5 Clothes dryer exhaust.

Clothes dryer exhaust systems shall be independent of all other systems and shall be exhausted outside the structure in accordance with the manufacturer's instructions.

Exception: Listed and *labeled* condensing (ductless) clothes dryers.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL



- International Property Maintenance Code
 - [2012 (Second Printing)]
- Chapter 4 - Light, Ventilation and Occupancy Limitations
 - SECTION 401 GENERAL
 - SECTION 402 LIGHT
 - SECTION 403 VENTILATION
 - SECTION 404 OCCUPANCY LIMITATIONS

404.1 Privacy.

404.2 Minimum room widths.

404.3 Minimum ceiling heights.

404.4 Bedroom and living room requirements.

404.5 Overcrowding.

404.6 Efficiency unit.

404.7 Food preparation.

404.1 Privacy.

404.2 Minimum room widths.

404.3 Minimum ceiling heights.

404.4 Bedroom and living room requirements.

404.5 Overcrowding.

404.6 Efficiency unit.

404.7 Food preparation.

Top Previous Section Next Section To view the next subsection please select the Next Section option.

SECTION 404 OCCUPANCY LIMITATIONS

404.1 Privacy.

Dwelling units, hotel units, housekeeping units, rooming units and dormitory units shall be arranged to provide privacy and be separate from other adjoining spaces.

404.2 Minimum room widths.

habitable room, other than a kitchen, shall be a minimum of 7 feet (2134 mm) in any plan dimension. Kitchens shall have a minimum clear passageway of 3 feet (914 mm) between counterfronts and appliances or counterfronts and walls.

404.3 Minimum ceiling heights.

Habitable spaces, hallways, corridors, laundry areas, *bathrooms*, *toilet rooms* and *habitable basement* areas shall have a minimum clear ceiling height of 7 feet (2134 mm).

Exceptions:

1. In one- and two-family dwellings, beams or girders spaced a minimum of 4 feet (1219 mm) on center and projecting a maximum of 6 inches (152 mm) below the required ceiling height.
2. *Basement* rooms in one- and two-family dwellings occupied exclusively for laundry, study or recreation purposes, having a minimum ceiling height of 6 feet 8 inches (2033 mm) with a minimum clear height of 6 feet 4 inches (1932 mm) under beams, girders, ducts and similar obstructions.
3. Rooms occupied exclusively for sleeping, study or similar purposes and having a sloped ceiling over all or part of the room, with a minimum clear ceiling height of 7 feet (2134 mm) over a minimum of one-third of the required minimum floor area. In calculating the floor area of such rooms, only those portions of the floor area with a minimum clear ceiling height of 5 feet (1524 mm) shall be included.

404.4 Bedroom and living room requirements.

Every *bedroom* and living room shall comply with the requirements of Sections 404.4.1 through 404.4.5.

404.4.1 Room area.

Every living room shall contain at least 120 square feet (11.2 m²) and every bedroom shall contain a minimum of 70 square feet (6.5 m²) and every bedroom occupied by more than one person shall contain a minimum of 50 square feet (4.6 m²) of floor area for each occupant thereof.

404.4.2 Access from bedrooms.

Bedrooms shall not constitute the only means of access to other *bedrooms* or *habitable spaces* and shall not serve as the only means of egress from other *habitable spaces*.

Exception: Units that contain fewer than two *bedrooms*.

404.4.3 Water closet accessibility.

Every *bedroom* shall have access to at least one water closet and one lavatory without passing through another *bedroom*. Every *bedroom* in a *dwelling unit* shall have access to at least one water closet and lavatory located in the same story as the *bedroom* or an adjacent story.

404.4.4 Prohibited occupancy.

Kitchens and nonhabitable spaces shall not be used for sleeping purposes.

404.4.5 Other requirements.

Bedrooms shall comply with the applicable provisions of this code including, but not limited to, the light, *ventilation*, room area, ceiling height and room width requirements of this chapter; the plumbing facilities and water-heating facilities requirements of Chapter 5; the heating facilities and electrical receptacle requirements of Chapter 6; and the smoke detector and emergency escape requirements of Chapter 7.

404.5 Overcrowding.

Dwelling units shall not be occupied by more occupants than permitted by the minimum area requirements of Table 404.5.

TABLE 404.5 MINIMUM AREA REQUIREMENTS

SPACE	MINIMUM AREA IN SQUARE FEET		
	1-2 occupants	3-5 occupants	6 or more occupants
Living room ^{a, b}	120	120	150
Dining room ^{a, b}	No requirement	80	100
Bedrooms	Shall comply with <u>Section 404.4.1</u>		

For SI: 1 square foot = 0.093 m².

- a. See Section 404.5.2 for combined living room/dining room spaces.
- b. See Section 404.5.1 for limitations on determining the minimum occupancy area for sleeping purposes.

404.5.1 Sleeping area.

The minimum occupancy area required by Table 404.5 shall not be included as a sleeping area in determining the minimum occupancy area for sleeping purposes. All sleeping areas shall comply with Section 404.4.

404.5.2 Combined spaces.

Combined living room and dining room spaces shall comply with the requirements of Table 404.5 if the total area is equal to that required for separate rooms and if the space is located so as to function as a combination living room/dining room.

404.6 Efficiency unit.

Nothing in this section shall prohibit an efficiency living unit from meeting the following requirements:

1. A unit occupied by not more than one occupant shall have a minimum clear floor area of 120 square feet (11.2 m²). A unit occupied by not more than two *occupants* shall have a minimum clear floor area of 220 square feet (20.4 m²). A unit occupied by three *occupants* shall have a minimum clear floor area of 320 square feet (29.7 m²). These required areas shall be exclusive of the areas required by Items 2 and 3.
2. The unit shall be provided with a kitchen sink, cooking appliance and refrigeration facilities, each having a minimum clear working space of 30 inches (762 mm) in front. Light and *ventilation* conforming to this code shall be provided.
3. The unit shall be provided with a separate *bathroom* containing a water closet, lavatory and bathtub or shower.
4. The maximum number of *occupants* shall be three.

404.7 Food preparation.

All spaces to be occupied for food preparation purposes shall contain suitable space and equipment to store, prepare and serve foods in a sanitary manner. There shall be adequate facilities and services for the sanitary disposal of food wastes and refuse, including facilities for temporary storage.

[Top](#) [Previous Section](#) [Next Section](#) To view the next subsection please select the Next Section option.

COPYRIGHT 2007 by INTERNATIONAL CODE COUNCIL